



AL250 P35	•
AL450WM Tail P36)
AL450NM Tail P37	,
ALI I 00RAFO II)
ALI200NP II)
ALI200WP II)
AL1200XWP II)
ALI200NP Tail II)
ALI200WP Tail II P39)
ALI800PTri Color II)
AL2600XWP II)

Batteries ·····	P.64
Camera Arms	P.70
Camera Clips & Accessories	P.70
Camera Trays	P.62
Camera Filters	P60
CB6500P	P.20
CB9000P	P.22
CB15000P	P.24
CF450 II	P.48
CFI200P II	P.49
Chargers	P.64
Combo Packs	P.56
Easy Clip Lights	P.54
Easy Release Mount Series ·····	P.58
Float Arms, Flexi Arms	. P.69
Fluorodive Kits	P.60



	TL2600P
	TL3500P P27
Gloves, Hoods & Handles	TL3500P Supreme P34
HL450N P50	TL4800P PZB
HL450XW P51	TL4800PC Slim P30
HL1000N	TL8000P
HL1000XW	VL4200P
Light Filters P55	VL8000P Tri Color P4
Light Head P45	VL10000PP5
Outdoor Dry Bags P58	VLI5000P Pro Mini PB
Protective Case Series P59	VLI5000P Pro Mini Tri Color ···· (PID
RGB White II	VL33000P II
Red Spot Light &	VTL2600P
Green Spot Light Snoots P55	VTL3800P
Spring Cord P57	VTL8000P
	VTL8000PC Slim PIB

VL4200P

Li ion Rechargeable Battery LED Video Light





Sturdy glove for hands-free operation underwater



4 levels of brightness for Flood beam mode, I level of brightness of Red color mode and SOS controlled by a reliable push button design



BATCELL 32650 Li ion Rechargeable Battery



Built-in red color led enhances focusing performance















Available in 3 colors

Light source

Light output (Flood beam mode)

Light output (Red color mode)

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass Lanyard 6 x XML LED + 4 x XPE Red LED

420 Lm (level I), 1050 Lm (level II) 2100 Lm (level III), 4200 Lm (level IV)

200 Lm

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack

32650

120° wide beam

6500K

1.5 hrs (level IV), 3 hrs (level III)

6 hrs (level II) and 15 hrs (level I)

100 m tested

Dia. 44 x L. 121.1 mm

318 g (including battery)

-167 g (including battery)

Push button with battery indicator

Tempered optical glass



Comes with ball joint for easy system setup



Removable yellow filter enhances warmer color tone



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



Come with random color outdoor dry bag

VL8000P TRI COLOR

Li ion Rechargeable Battery High Power LED Video Light with Three Color Output





3 Levels of brightness for cool white mode, 3 Levels of brightness for warm white mode I level of brightness of Red color mode and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL18650x4 Li ion Rechargeable Battery



Built-in red color led enhances focusing performance













Light source

Light output (Cool white mode)

Light output (Warm white mode)

Light output (Red white mode)

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

Lanyard

15 x XML LED + 6 x XPE Red LED

2000 Lm (level I), 4000 Lm (level II) 8000 Lm (level III)

1000 Lm (level I), 2000 Lm (level II) 4000 Lm (level III)

500 Lm

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack BATCELL18650x4

120° wide beam

6500K cool white and

5500K warm white

3 hrs (level III), 6 hrs (level II) and 12 hrs (level I)

100 m tested

Dia. 55.4 x L. 130.6mm

457 g (including battery)

-173 g (including battery)

Push button with battery indicator

Tempered optical glass



Built-in yellow color led enhances warmer color tone



Sturdy glove for hands-free operation underwater



Comes with ball joint for easy system setup



Come with random color outdoor dry bag

VL10000P

Li ion Rechargeable Battery High Power LED Video Light





4 Levels of brightness, I level of brightness of Red color mode and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL18650x4 Li ion Rechargeable Battery



Built-in red color led enhances focusing performance













Light source

Light output

Light output (Red color mode)

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

Lanyard

15 x XML LED + 6 x XPE Red LED

1000 Lm (level I), 2500 Lm (level II) 5000 Lm (level III), 10000 Lm (level IV)

500 Lm

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack

BATCELL18650x4

120° wide beam

6500K

2.5 hrs (level IV), 5 hrs (level III)

10 hrs (level II) and 25 hrs (level I)

100 m tested

Dia. 55.4 x L. 130.6mm

457g (including battery)

-173g (including battery)

Push button with battery indicator

Tempered optical glass



Removable yellow filter enhances warmer color tone



Sturdy glove for hands-free operation underwater



Comes with ball joint for easy system setup



Come with random color outdoor dry bag

VL15000P PRO MINI

Li ion Rechargeable Battery Super





4 levels of brightness I level of brightness of Red color mode and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color




BATCELL18650x7 Li ion Rechargeable Battery



Built-in red color led enhances focusing performance







Light source Light output

Light output (Red color mode)

Casing material

Power source

Angle of light beam Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

24 x XML LED + 8 x XPE Red LED

1500 Lm (level I), 3750 Lm (level II) 7500 Lm (level III), 15000 Lm (level IV)

1000 Lm

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack BATCELL18650x7

160° wide beam

6500K

2 hrs (level IV), 4 hrs (level III) 8hrs (level II) and 20 hrs (level I)

100 m tested

Dia. 70 x L. 131mm

754 g (including battery)

-295 g (including battery)

Push button with battery indicator

Tempered optical glass



24pcs XML LED to provide 15000 lumens



Comes with ball joint for easy system setup



Ergonomic aluminum handle comes in a package



Come with protective case for VL 15000P Pro Mini.



FILFLUORO I 5000 Fluorodive filter for VL I 5000P Pro Mini. Sold separately.

VL15000P PRO MINI TRI COLOR

Li ion Rechargeable Battery Super Power LED Video Light with Three Color Output





Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL18650×7 Li ion Rechargeable Battery



Built-in red color led enhances focusing performance



Built-in yellow color led enhances warmer color tone



Come with protective case for VL 15000P Pro Mini Tri Color.









Light source

Light output (Cool white mode)

Light output (Warm white mode)

Light output (Red color mode)

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

32 x XML LED + 8 x XPE Red LED

3750 Lm (level I), 7500 Lm (level II) 15000 Lm (level III)

1500 Lm (level I), 3000 Lm (level II) 6000 Lm (level III)

1000 Lm

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack BATCELL18650x7

160° wide beam

6500K cool white and

5500K warm white

2 hrs (level III), 4 hrs (level II) and 8 hrs (level I)

100 m tested

Dia. 70 x L. 131mm

769 g (including battery)

-310 g (including battery)

Push button with battery indicator

Tempered optical glass



Angle of light beam

Ergonomic aluminum handle comes in a package



FILFLUORO 15000 Fluorodive filter for VL 15000P Pro Mini Tri Color. Sold separately.



Comes with ball joint for easy system setup



3 Levels of brightness for cool white mode, 3 Levels of brightness for warm white mode, I level of brightness of Red color mode, and SOS controlled by a reliable push button design

VL33000P II





4 levels of brightness, I level of brightness of Red color mode and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



Easy to charge up the battery pack BATCELL 21700x8



Built-in red color led enhances focusing performance









Light source

Light output

Light output (Red color mode)

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

45 x XML LED + 10 x XPE Red LED

3300 Lm (level I), 8250 Lm (level II) 16500 Lm (level III), 33000 Lm (level IV)

1200 Lm

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack

BATCELL 21700x8

160° wide beam

6500K

1.5 hrs (level IV), 3 hrs (level III)

6 hrs (level II) and 15 hrs (level I)

100 m tested

Dia. 85 x L. 144.6mm

1391g (including battery)

-597g (including battery)

Push button with battery indicator

Tempered optical glass



The Most

Brightness



45pcs XML LED to provide 33000 lumens



Comes with ball joint for easy system setup



Ergonomic aluminum handle comes in a package



Come with protective case for VL 33000P II.

VTL2600_P











Li ion Rechargeable Battery LED Video /

Tech Light Available in 2 colors

4 levels of brightness for Flood beam mode, I level of brightness for Spot beam mode and I level of brightness for Red color mode controlled by a reliable push button design

SPECIFICATIONS

Light source Light output (Flood beam mode)

Light output (Spot beam mode)

Light output (Red color mode)

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass Lanyard

7 x LED + 2 x XPE Red LED

260 Lm (level I), 650 Lm (level II) 1300 Lm (level III), 2600 Lm (level IV)

1000 Lm

100 lm

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack

32650

100° wide beam and 10° narrow beam

6500K

1.5 hrs (level IV), 3 hrs(level III) 6 hrs (level II) and 15 hrs (level I)

100 m tested

Dia. 44 x L. 128.7 mm

339 g (including battery)

-177 g (including battery)

Push button with battery indicator

Tempered optical glass



Sturdy glove for hands-free operation underwater



Built-in red color led enhances focusing performance



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL 32650 Li ion Rechargeable Battery



Removable yellow filter enhances warmer color



Angle of light beam



Comes with ball joint for easy system setup



Come with random color outdoor dry bag

VTL3800P











Li ion Rechargeable Battery LED Video / Tech Light



120° Wide beam 10° Narrow beam

SPECIFICATIONS

Light source

Light output (Flood beam mode)

Light output (Spot beam mode)

Light output (Red color mode)

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

Lanyard

7 x XML LED + 2 x XPE Red LED

380 Lm (level I), 950 Lm (level II) 1900 Lm (level III), 3800 Lm (level IV)

1200 Lm

100 Lm

Aluminum alloy.
Anti-corrosive anodized

Li ion Rechargeable battery pack

32650

120° wide beam and 10° narrow beam

6500K

1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)

100 m tested

Dia. 55.5 x L. 140.6 mm

432 g (including battery)

-205 g (including battery)

Push button with battery indicator

Tempered optical glass



Sturdy glove for hands-free operation underwater



Built-in red color led enhances focusing performance



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red



BATCELL 32650 Li ion Rechargeable Battery



4 levels of brightness for Flood beam mode, I level of brightness for Spot beam mode and I level of brightness for Red color mode controlled by a reliable push button design



Removable yellow filter enhances warmer color



Angle of light beam



Comes with ball joint for easy system setup



Come with random color outdoor dry bag

VTL8000P

Li ion Rechargeable Battery High Power LED Video / Tech Light 120°
Wide beam
10°
Narrow beam





Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



Angle of light beam



Built-in red color led enhances focusing performance



4 Levels of brightness for Flood beam mode, I level of brightness for Spot beam mode and I level of brightness for Red color mode controlled by a reliable push button design











Light source

Light output (Flood beam mode)

Light output (Spot beam mode)

Light output (Red color mode)

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

Lanyard

II x XML LED + 6 x XPE Red LED

800 Lm (level II), 2000 Lm (level II) 4000 Lm (level III), 8000 Lm (level IV)

1200 Lm

500 Lm

Aluminum alloy.
Anti-corrosive anodized

Li ion Rechargeable battery pack BATCELL18650x4

120° wide beam and 10° narrow beam

6500K

3 hrs (level IV), 6 hrs (level III) 12 hrs (level II) and 30 hrs (level I)

100 m tested

Dia. 63x L. 150.3mm

548g (including battery)

-203g (including battery)

Push button with battery indicator

Tempered optical glass



Removable yellow filter enhances warmer color tone



Sturdy glove for hands-free operation underwater



Comes with ball joint for easy system setup



BATCELL18650x4 Li ion Rechargeable Battery



Come with random color outdoor dry bag





Comes with ball joint for easy system setup



BATCELL 18650x8 Li ion Rechargeable Battery



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



Built-in red color led enhances focusing performance



Slim fit Goodman handle with connector. Comes in a package



Removable yellow filter enhances warmer color tone









Light source

Light output (Flood beam mode)

Light output (Spot beam mode)

Light output

(Red color mode)

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size (Light head)

Size (Canister)

Weight in air (Light head)

Weight in air (Canister)

Buoyancy in seawater (Light head)

Buoyancy in seawater

(Canister)

Switching system

Front glass

II x XML LED + 6 x XPE Red LED

800 Lm (level I), 2000 Lm (level II) 4000 Lm (level III), 8000 Lm (level IV)

1200 Lm

500 Lm

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack

BATCELL18650x8

120° wide beam and 10° narrow beam

6500K

6 hrs (level IV), 12 hrs (level III) 24 hrs (level II) and 60 hrs (level I)

100 m tested

Dia. 63x L. 106.5mm

Dia. 55 x L. 181.5mm

317g

713g

-101g

-267g

Push button with battery indicator

Tempered optical glass



Easy to charge up the canister



Angle of light beam



VTL8000PCLH light head and Canister for VTL8000PC Slim can buy seperately.



90 degree sidemount connector cable. Sold seperately.



Come with protective case for VTL 8000 PC Slim



4 Levels of brightness for Flood beam mode, I level of brightness for Spot beam mode and I level of brightness for Red color mode controlled by a reliable push button design 19

CB6500P

Li ion Rechargeable Battery High Power LED Video Light with High Color Rendering Index





4 Levels of brightness, I level of brightness of Red color mode and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL 21700x4 Li ion Rechargeable Battery



Snoot connector for CB6500P. Sold separately.











Light source

Light output

Light output (Red color mode)

Casing material

Power source

Angle of light beam

Color temperature

Color Rendering Index

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

Lanyard

COB LED + 6 x XPE Red LED

650 Lm (level I), 1625 Lm (level II) 3250 Lm (level III), 6500 Lm (level IV)

500 Lm

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack

BATCELL 21700x4

120° wide beam

5000K

Ra 85

2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)

100 m tested

Dia. 63 x L. 134.6mm

653g (including battery)

-272g (including battery)

Push button with battery indicator

Tempered optical glass



Built-in red color led enhances focusing performance



Sturdy glove for hands-free operation underwater



Comes with ball joint for easy system setup



Come with random color outdoor dry bag

CB9000P





4 Levels of brightness, I level of brightness of Red color mode and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL 21700x4 Li ion Rechargeable Battery



Snoot connector for CB 9000P. Sold separately.











Light source COB LED + 6 x XPE Red LED

Light output 900 Lm (level I), 2250 Lm (level II)

4500 Lm (level III), 9000 Lm (level IV)

Light output 500 Lm

(Red color mode)

Casing material Aluminum alloy.

Anti-corrosive anodized

Power source Li ion Rechargeable battery pack

BATCELL 21700x4

Angle of light beam 120° wide beam

Color temperature 5000K

Color Rendering Index Ra 85

Burn time I.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)

(----, ----

Maximum depth 100 m tested

Size Dia. 63 x L. 134.6mm

Weight in air 654g (including batter)

Weight in air 654g (including battery)

Buoyancy in seawater -273g (including battery)

Switching system Push button with battery indicator

Front glass Tempered optical glass

Lanyard Included



Built-in red color led enhances focusing performance



Sturdy glove for hands-free operation underwater



Comes with ball joint for easy system setup



Come with random color outdoor dry bag

CB15000P

Li ion Rechargeable Battery Super Power





4 levels of brightness I level of brightness of Red color mode and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL18650x7 Li ion Rechargeable Battery



Built-in red color led enhances focusing performance









Light source

Light output

Light output (Red color mode)

Casing material

Power source

Angle of light beam

Color temperature

Color Rendering Index

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

COB LED + 8 x XPE Red LED

1500 Lm (level I), 3750 Lm (level II) 7500 Lm (level III), 15000 Lm (level IV)

1000 Lm

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack BATCELL18650x7

160° wide beam

5000K

Ra 85

1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)

100 m tested

Dia. 70 x L. 131mm

773g (including battery)

-314g (including battery)

Push button with battery indicator

Tempered optical glass



to provide



Comes with ball joint for easy system setup



Ergonomic aluminum handle comes in a package



Come with protective case for CBI5000P.



FILFLUORO I 5000 Fluorodive filter for CB I 5000P. Sold separately.

TL2600P









Li ion Rechargeable Battery LED Tech Light



SPECIFICATIONS

Light source

Light output

Casing material

....

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

- vveignt in air

Buoyancy in seawater

Switching system

Front glass Lanyard 3 x LED

260 Lm (level I), 650 Lm (level II) 1300 Lm (level III), 2600 Lm (level IV)

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack

32650

10° narrow beam

6500K

1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)

100 m tested

Dia. 50x L. 130 mm

359 g (including battery)

-188 g (including battery)

Push button with battery indicator

Tempered optical glass

Included



4 Levels of brightness and SOS controlled by a reliable push button design



BATCELL 32650 Li ion Rechargeable Battery



built-in: Blue color /

Green color / Red color / Flash Red color

Ergonomic aluminum handle comes in a package



Goodman handle with connector or Slim fit Goodman handle with connector. Sold seperately.



Sturdy Goodman Glove for handy Tech-dive operation



Come with random color outdoor dry bag



TL3500P







Li ion Rechargeable Battery LED Tech Light



SPECIFICATIONS

Light source

Light output

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

Lanyard

3 x XML LED

350 Lm (level I), 875 Lm (level II) 1750 Lm (level III), 3500 Lm (level IV)

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack

32650

10° narrow beam

6500K

1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)

150 m tested

Dia, 63x L. 135.6 mm

447 g (including battery)

-217 g (including battery)

Push button with battery indicator

Tempered optical glass

Included



4 Levels of brightness and SOS controlled by a reliable push button design



BATCELL 32650 Li ion Rechargeable Battery



/ Flash Red color

Green color / Red color

Ergonomic aluminum handle comes in a package



Goodman handle with connector or Slim fit Goodman handle with connector. Sold seperately.



Sturdy Goodman Glove for handy Tech-dive operation



Come with random color outdoor dry bag



TL4800P

Li ion Rechargeable Battery High Power LED Tech Light





4 Levels of brightness and SOS controlled by a reliable push button design



BATCELL18650x4 Li ion Rechargeable Battery



Sturdy Goodman Glove for handy Tech-dive operation









Light source

Light output

Casing material

Power source

Angle of light beam Color temperature

_

Burn time

Maximum depth

Size

Weight in air
Buoyancy in seawater

Switching system

Front glass

Lanyard

4 x XML LED

480 Lm (level I), I 200 Lm (level II) 2400 Lm (level III), 4800 Lm (level IV)

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack

BATCELL18650x4

10° narrow beam

6500K

2 hrs (level IV), 4 hrs (level III)

8 hrs (level II) and 20 hrs (level I)

150 m tested

Dia. 72 x L. 150.3mm

596 g (including battery)

-222 g (including battery)

Push button with battery indicator

Tempered optical glass



Ergonomic aluminum handle comes in a package



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



Goodman handle with connector or Slim fit Goodman handle with connector. Sold seperately.



Come with random color outdoor dry bag





4 Levels of brightness and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL18650x8 Li ion Rechargeable Battery



Ergonomic aluminum handle comes in a package





Light source

Light output

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size (Light head)

Size (Canister)

Weight in air (Light head)

Weight in air (Canister)

Buoyancy in seawater

(Light head)

Buoyancy in seawater

(Canister)

Switching system

Front glass

4 x XML LED

480 Lm (level I), I 200 Lm (level II) 2400 Lm (level III), 4800 Lm (level IV)

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack

BATCELL18650x8

10° narrow beam

6500K

7 hrs (level IV), 14 hrs (level III) 28 hrs (level II) and 70 hrs (level I)

100 m tested

Dia. 72 x L. 88.3mm

Dia. 55 x L. 181.5mm

380g

713g

-134g

-267g

Push button with battery indicator

Tempered optical glass



Slim fit Goodman handle with connector. Comes in a package



Easy to charge up the canister



90 degree sidemount connector cable. Sold seperately.



TL4800PCLH light head and Canister for TL4800PC Slim can buy seperately.



Come with protective case for TL 4800 PC Slim

TL8000P

Li ion Rechargeable Battery Super Power LED Tech Light





4 levels of brightness and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color





Light source

Light output

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

8 x LED

800 Lm (level I), 2000 Lm (level II)

4000 Lm (level III), 8000 Lm (level IV)

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack

BATCELL18650x7

10° narrow beam

6500K

2 hrs (level IV), 4 hrs (level III)

8 hrs (level II) and 20 hrs (level I)

150 m tested

Dia. 72 x L. 138.8 mm

784 g (including battery)

-290 g (including battery)

Push button with battery indicator

Tempered optical glass



BATCELL18650x7 Li ion Rechargeable Battery



Ergonomic aluminum handle comes in a package



Slim fit Goodman handle with connector. Comes in a package



Come with random color outdoor dry bag

TL3500P SUPREME





Li ion Rechargeable Battery

LED Tech Light





Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color

SPECIFICATIONS

Light source

Light output

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

Lanyard

3 x XML LED

350 Lm (level I), 875 Lm (level II) 1750 Lm (level III), 3500 Lm (level IV)

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack BATCELL 18650x4SUPREME

10° narrow beam

6500K

3 hrs (level IV), 6 hrs (level III) 12 hrs (level II) and 30 hrs (level I)

150 m tested

Dia. 63x L. 119 mm

517 g (including battery)

-221 g (including battery)

Push button with battery indicator

Tempered optical glass



4 Levels of brightness and SOS controlled by a reliable push button design



Ergonomic aluminum handle comes in a package



BATCELL18650x4 SUPREME Li ion Rechargeable Battery



Goodman handle with connector or Slim fit Goodman handle with connector. Sold seperately.



Sturdy Goodman Glove for handy Tech-dive operation



Come with random color outdoor dry bag

AL250



Multi-Function Aluminum LED Light



SPECIFICATIONS

Light source

Light output

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Front glass

Lanyard

I x XPG LED

250 Lm

Aluminum alloy.

Anti-corrosive anodized

2xAA alkaline or Ni-MH batteries

8° narrow beam

6500K

Up to 2 hrs

100 m tested

Dia. 28x L. 147.8 mm

135 g (including battery)

-85 g (including battery)

Tempered optical glass





Light is suitable for multi-function



Operate with 2xAA batteries



Our light can fit in glove or pouch. Sold separately.



Available in 5 colors

AL450wm TAIL



LED Aluminum Diving Light with Tail Switch Button





3xAAA stand-alone battery holder



AL 450WM Tail LED with Glove



AL 450WM Tail LED with Pouch



Push on / off button on the

bottom

AL 450WM Tail LED with Pouch and Glove

SPECIFICATIONS

- 450 Lumens Cree LED
- Size: Dia.36 x L.122.6mm
- Aluminum Alloy, anti-corrosive anodized
- 3xAAA alkaline or Ni-MH batteries
- · Angle of light beam: 40°
- · Up to 4hrs of burn time
- · Lanyard included
- · 160g (including batteries) weight in air
- -74g (including batteries) buoyancy in seawater
- · Switching System: Push Button



AL450 NM TAIL SPOTTER



Narrow Beam Aluminum LED Light with Tail Switch Button





Push on / off button on the bottom



3xAAA stand-alone battery holder



AL 450NM Tail LED with Glove



AL 450NM Tail LED with



AL 450NM Tail LED with Pouch and Glove

SPECIFICATIONS

- 450 Lumens Cree LED
- Size : Dia.42 x L.125.4mm
- Aluminum Alloy, anti-corrosive anodized
- 3xAAA alkaline or Ni-MH batteries
- · Angle of light beam: 8°
- · Up to 4hrs of burn time
- · Lanyard included
- 185g (including batteries) weight in air
- -79g (including batteries) buoyancy in seawater
- · Switching System: Push Button

AL1200NP TAIL II











SPECIFICATIONS

Light source

Light output

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass Lanyard XML LED

120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV)

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack

18650

10° narrow beam

6500K

2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)

100 m tested

Dia. 33.2 x L. 152.2 mm

189 g (including battery)

-87 g (including battery)

Push button with battery indicator

Tempered optical glass



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



4 Levels of brightness and SOS controlled by a reliable push button design



Protective case for AL 1200NP Tail II. Sold separately.



Our light can fit in glove or pouch. Sold separately.



FILREDNP Red filter for ALI 200NP Tail II Sold seperately.



BATCELL 18650 Li ion Rechargeable Battery



Come with random color outdoor dry bag

AL1200WP TAIL II







LI ion Rechargeable Battery Wide Beam LED Light with Tail Switch Button







4 Levels of brightness and SOS controlled by

a reliable push button

design

Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color

Green color / Red color Flash Red color



Light source

Light output

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass Lanyard XML LED

120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV)

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack

18650

85° wide beam

6500K

2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)

100 m tested

Dia. 35.5 x L. 137.7 mm

177 g (including battery)

-88 g (including battery)

Push button with battery indicator

Concave lens

Included



Snoot connector for ALI 200VVP Tail II. Sold separately.



FILYEL 35 FILRED 35

Removable red and yellow filters enhances focusing performances and warm color tone



BATCELL 18650 Li ion Rechargeable Battery



Comes with the clip for easy system setup



Our light can fit in glove or pouch. Sold separately.



Protective case for AL 1200WP Tail II. Sold separately.



Come with random color outdoor dry bag

AL1100 RAFO II









LI ion Rechargeable Battery Wide Beam LED Light with



SPECIFICATIONS

Light source

Light output

Light output (Red color mode)

Casing material

Power source

Angle of light beam

Color temperature

AFO interval

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

Lanyard

XML LED + 2 x XPE Red LED

110 Lm (level I), 275 Lm (level II) 550 Lm (level III), 1100 Lm (level IV)

150 Lm

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack 18650

55° wide beam

6500K

0.2sec. +/- 0.1 sec.

2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)

100 m tested

Dia. 42.4 x L. 128.3 mm

242 g (including battery)

-129 g (including battery)

Push button with battery indicator

Tempered optical glass



4 levels of brightness, I level of brightness of Red color mode and SOS controlled by a reliable push button design



Comes with ball joint for easy system setup



Automatic Flash Off Function AFO interval: 0.2 sec. +/- 0.1 sec.



Built-in red color led enhances focusing performance



BATCELL 18650 Li ion Rechargeable Battery



Come with random color outdoor dry bag

RGB WHITE IT







LI ion Rechargeable Battery

4 Colors LED Light



Battery level indicator built-in: Blue color / Green color /Red color / Flash Red color

SPECIFICATIONS

Light source

Light output

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

Lanyard

LED

500 Lm (white), 120 Lm (red) 40 Lm (blue), 300 Lm (green)

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack

18650

85° wide beam

6500K

2 hrs

100 m tested

Dia. 35.5 x L. 126.3 mm

162 g (including battery)

-84 g (including battery)

Push button with battery indicator

Concave lens

Included



4 colors of light and SOS controlled by a reliable push button design



Comes with the clip for



Snoot 35

Snoot Connector for RGB White II. Sold separately.



BATCELL 18650 Li ion Rechargeable Battery



Built-in red color Led



Built-in green color Led



Built-in blue color Led



Come with random color outdoor dry bag

AL1200NP TT









LI ion Rechargeable Battery Narrow Beam LED Light



SPECIFICATIONS

Light source

Light output

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

Lanyard

XML LED

120 Lm (level I), 300 Lm (level II) 600 Lm (level III), I 200 Lm (level IV)

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack

18650

10° narrow beam

6500K

2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)

100 m tested

Dia. 33.2 x L. 139.8 mm

168 g (including battery)

-76 g (including battery)

Push button with battery indicator

Tempered optical glass



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



4 Levels of brightness and SOS controlled by a reliable push button design



Protective case for AL 1200NP II. Sold separately.



Our light can fit in glove or pouch. Sold



BATCELL 18650 Li ion Rechargeable Battery



FILREDNP Red filter for ALI200NP II. Sold seperately.



Come with random color outdoor dry bag


AL1200WP TT















Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color

Comes with the clip for easy system setup

SPECIFICATIONS

Light source

Light output

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

Lanyard

XML LED

120 Lm (level I), 300 Lm (level II) 600 Lm (level III), I 200 Lm (level IV)

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack

18650

85° wide beam

6500K

2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)

100 m tested

Dia. 35.5 x L. 126.3 mm

162 g (including battery)

-84 g (including battery)

Push button with battery indicator

Concave lens



4 Levels of brightness and SOS controlled by a reliable push button design



FILYEL 35 FILRED 35 Removable red and yellow filters enhances focusing performances



Our light can fit in glove or pouch. Sold separately.



Snoot Connector for ALI200WP II. Sold separately.



BATCELL 18650 Li ion Rechargeable Battery



Protective case for AL 1200WP II. Sold separately.



Come with random color outdoor dry bag

AL1200 xwp TT









LI ion Rechargeable Battery Extra



SPECIFICATIONS

Light source

Light output

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

Lanyard

XML LED

120 Lm (level I), 300 Lm (level II) 600 Lm (level III), I 200 Lm (level IV)

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack

18650

120° wide beam

6500K

2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)

100 m tested

Dia. 35.5 x L. 122.1 mm

160 g (including battery)

-84 g (including battery)

Push button with battery indicator

Tempered optical glass

Included

4 Levels of brightness and SOS controlled by a reliable push button design




FILYEL 35 FILRED 35 Removable red and yellow filters enhances focusing performances



Our light can fit in glove or pouch. Sold separately. and warm color tone



Snoot Connector for ALI200XWP II. Sold separately.





BATCELL 18650 Li ion Rechargeable Battery



built-in: Blue color / Green color / Red color / Flash Red color

Comes with the clip


for easy system setup

Protective case for AL 1200XWP II. Sold separately.



Come with random color outdoor dry bag





Light heads can fit for VL 4200P, VTL 2600P & TL2600P



AL 1200NPLH II



VL 4200PLH



VL 8000PLH Tri Color



TL 3500PLH









VTL 3800PLH




















Light heads can fit for CB 6500P & CB 9000P.



BLACK MOLLY IV AL1800xwp II TRI COLOR

















SPECIFICATIONS

Light source

Light output (Cool white mode)

Light output (Warm white mode)

Light output (Red color mode)

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

Lanyard

4 x XML LED + 2 x XPE Red LED

450Lm (level I), 900 Lm (level II) 1800 Lm (level III)

450Lm (level I), 900 Lm (level II) 1800 Lm (level III)

150 Lm

Aluminum alloy. Anti-corrosive anodized

Li ion Rechargeable battery pack 26650

120° wide beam

6500K cool white and 5500K warm white

2 hrs (level III), 4 hrs (level II) and 8 hrs (level I)

100 m tested

Dia. 35.5 x L. 126.8 mm

218 g (including battery)

-105 g (including battery)

Push button with battery indicator

Tempered optical glass

Included



Available in 2 colors

Built-in red color led enhances focusing performance



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



Built in yellow color led enhances warmer color



Protective case for AL 1800XWPTri Color II and Single Arm Tray. Sold separately.



cool white mode,3 Levels of brightness for warm white mode I level of brightness of Red color mode and SOS controlled by a reliable push button design



BATCELL26650 Li ion Rechargeable Battery



Comes with ball joint for easy system setup



Protective case for AL 1800XWPTri Color II. Sold separately.



Come with random color outdoor dry bag

AL2600xwp II













SPECIFICATIONS

Light source Light output

Light output (Red color mode)

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Treight in an

Buoyancy in seawater

Switching system

Front glass

Lanyard

4 x XML LED + 2 x XPE Red LED

260 Lm (level I), 650 Lm (level II) 1300 Lm (level III), 2600 Lm (level IV)

150 Lm

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack

26650

120° wide beam

6500K

2 hrs (level IV), 4 hrs (level III)

8 hrs (level II) and 20 hrs (level I)

100 m tested

Dia. 35.5 x L. 126.8 mm

218 g (including battery)

-105 g (including battery)

Push button with battery indicator

Tempered optical glass

Included

Built-in red color led enhances focusing performance



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL26650 Li ion Rechargeable Battery



Protective case for AL 2600XWP II and Single Arm Tray. Sold separately.



controlled by a reliable

Removable yellow filter enhances warmer color tone



Comes with ball joint for easy system setup



Protective case for AL 2600XWP II. Sold separately.



Come with random color outdoor dry bag





SPECIFICATIONS

Light source
Light output
Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

Lanyard

Cree LED

450 Lm

Aluminum alloy.

Anti-corrosive anodized

3xAAA alkaline or

Ni-MH batteries

7° to 37° adjustable

6500K

Up to 4hrs

100 m tested

Dia. 35.5 x L. 131.9mm

216 g (including batteries)

-104 g (including batteries)

Magnetic Swivel

Tempered optical glass &

Convex Lens



Twist the front to change the focus (Turning force increases with depth)



CF 450 II LED with Glove



CF 450 II LED with Pouch



Magnetic Swivel Switch allows for one hand operation



3xAAA stand-alone battery holder



CF 450 II LED with Pouch and Glove

CF1200P II









LI ion Rechargeable Battery Changeable Focus LED Light



SPECIFICATIONS

Light source

Light output

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

Lanyard

XML LED

120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV)

Aluminum alloy.

Anti-corrosive anodized

Li ion Rechargeable battery pack

7° narrow beam to 37° wide beam

6500K

2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)

100 m tested

Dia, 35.5 x L. 169.3mm

245 g (including battery)

-121 g (including battery)

Push button with battery indicator

Tempered optical glass



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



4 Levels of brightness and SOS controlled by a reliable push button design



Twist the front to change the focus (Turning force increases with depth)



BATCELL 18650 Li ion Rechargeable Battery



Come with random color outdoor dry bag 4

HL450_N

Narrow Beam LED Head Light

450 lumens



SPECIFICATIONS

Light source

Light output

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

Cree LED

45 Lm (level I), I I 3 Lm (level II) 225 Lm (level III), 450 Lm (level IV)

Aluminum alloy light head and Polycarbonate body

3 x AAA alkaline batteries

8° narrow beam

6500K

2 hrs (level IV), 4 hrs (level III)

8 hrs (level II) and 20 hrs (level I)

100 m tested

Dia. 36.8 x L. 84.4 mm with

light head dia. 41mm

187 g (including batteries)

-56 g (including batteries)

Push button with battery indicator



4 levels of brightness and SOS controlled by a reliable push button design



3 x AAA alkaline batteries



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



FILREDHLN Red filter for HL 450N. Sold separately.

HL450xw

Extra Wide Beam LED Head Light







SPECIFICATIONS

Light source Light output

Light output (Red color mode)

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

2 x Cree LED +2 x XPE Red LED

45 Lm (level I), I I 3 Lm (level II) 225 Lm (level III), 450 Lm (level IV)

100 Lm

Aluminum alloy light head and

Polycarbonate body

3 x AAA alkaline batteries

120° wide beam

6500K

2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)

100 m tested

Dia. 36.8 x L. 84.4 mm with light head dia. 38.8 mm

189 g (including batteries)

-58 g (including batteries)

Push button with battery indicator



Built-in red color led enhances focusing performance



4 levels of brightness, I level of brightness of Red color mode and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



3 x AAA alkaline batteries

HL1000_N

Li ion Rechargeable Battery Narrow Beam LED Head Light

1000 lumens



SPECIFICATIONS

Light source

Light output

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

Cree LED

100 Lm (level I), 250 Lm (level II) 500 Lm (level III), 1000 Lm (level IV)

Aluminum alloy light head and

Polycarbonate body

Li ion Rechargeable battery pack

BATCELL18650

8° narrow beam

6500K

2 hrs (level IV), 4 hrs (level III)

8 hrs (level II) and 20 hrs (level I)

100 m tested

Dia. 36.8 x L. 84.4 mm with

light head dia. 41 mm

205 g (including battery)

-74 g (including battery)

Push button with battery indicator



4 levels of brightness and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL 18650 Li ion Rechargeable Battery




FILREDHLN Red filter for HL 1000N. Sold separately.

HL1000xw

Li ion Rechargeable Battery Extra Wide Beam LED Head Light







Light source

Light output

Light output (Red color mode)

Casing material

Power source

Angle of light beam

Color temperature

Burn time

Maximum depth

Size

Weight in air

Buoyancy in seawater

Switching system

Front glass

2 x Cree LED +2 x XPE Red LED

100 Lm (level I), 250 Lm (level II) 500 Lm (level III), 1000 Lm (level IV)

150 Lm

Aluminum alloy light head and

Polycarbonate body

Li ion Rechargeable battery pack

BATCELL18650

120° wide beam

6500K

2 hrs (level IV), 4 hrs (level III)

8 hrs (level II) and 20 hrs (level I)

100 m tested

Dia. 36.8 x L. 84.4 mm with

light head dia. 38.8mm

207 g (including battery)

-76 g (including battery)

Push button with battery indicator



Built-in red color led enhances focusing performance



4 levels of brightness, I level of brightness of Red color mode and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL18650 Li ion Rechargeable Battery

EASY CLIP RAINBOW COLOR LIGHT


SPECIFICATIONS

- Available fifteen color output –
 Red, Green, Orange, Blue, Purple, Yellow, Light Blue, Flash red,
 Flash green, Flash orange, Flash blue, Flash purple, Flash yellow,
 Flash light blue automatically run all forteen modes.
- · 12-24 hrs of burn time
- 2 x CR2032 batteries
- Dia. 32 x L. 38mm
- 100 meter tested
- · Lanyard included
- · 23g (including batteries) weight in air
- · -3g (including batteries) buoyancy in seawater

Easily clip the light on the goggle, mask, belt and etc.

EASY CLIP LIGHT WITH FLASH



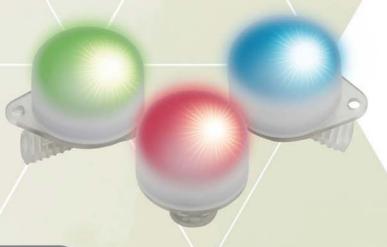

SPECIFICATIONS

- Available six color output –
 Blue, Red, Green, Flash Blue, Flash Red, Flash Green,
- Up to 36 hrs of burn time
- 2 x CR2032 batteries
- Dia. 32 x L. 38mm
- 100 meter tested
- · Lanyard included
- 23g (including batteries) weight in air
- -3g (including batteries) buoyancy in seawater



COMBO PACK SERIES

AL 450 NM Tail Spotter

Narrow Beam Aluminum LED Light with Tail Switch Button

AL 1200NP II

Li ion Rechargeable Battery Narrow Beam LED Light

Easy Clip Rainbow Color light



Narrow Beam Aluminum LED Light with Tail Switch Button

AL 1200WP II

Li ion Rechargeable Battery Wide Beam LED Light

Easy Clip Rainbow Color light

AL 250

Multi-Function Aluminum LED Light

AL 1200NP II

Li ion Rechargeable battery Narrow Beam LED Light

Easy Clip Rainbow Color light



AL 450 wm Tail

LED Aluminum Diving Light with Tail Switch Button

AL 1200NP II

Li ion Rechargeable Battery Narrow Beam LED Light

Easy Clip Rainbow Color light



AL 450 wm Tail

LED Aluminum Diving Light with Tail Switch Button

AL 1200WP II

Li ion Rechargeable Battery Wide Beam LED Light

Easy Clip Rainbow Color light



Multi-Function Aluminum LED Light

AL 1200WP II

Li ion Rechargeable battery Wide Beam LED Light

Easy Clip Rainbow Color light



GREEN SPOT LIGHT RED SPOT LIGHT



Operate with 2 x AAA batteries

CLIPMNTSPOT Mounting clip for Green Spot Light and Red Spot Light. Sold seperately.

SPECIFICATIONS

GREEN SPOT LIGHT

RED SPOT LIGHT

Light source : Green Laser
Light output : Below I mW
Casing material : Aluminum alloy.

Anti-corrosive anodized

Power source : 2 x AAA alkaline or

Ni-MH batteries

Wavelenght : 520nM
Burn time : Up to 24 hrs
Maximum depth : 100 m tested

Size : Dia. 19 x L. 168.6 mm

Weight in air : 89 g (including batteries)

Buoyancy in seawater : -54 g (including batteries)

Switching system : Twisting Bezel

Front glass : Tempered optical glass

Lanyard : Included

Red Laser Below I mW Aluminum alloy.

Anti-corrosive anodized 2 x AAA alkaline or Ni-MH batteries

650nM

Up to 24 hrs 100 m tested

Dia. 19 x L. 154.1 mm 82 g (including batteries) -51 g (including batteries)

Twisting Bezel

Tempered optical glass

PROTECTIVE CASE SERIES



Model:	PCI0I A	PC102 A	PC103 A	PCI04A	PC105 A	PC106 A
Outer Dimension :	225 x 180 x 100 mm	350 x 270 x 120 mm	340 x 310 x 120 mm	360 x 285 x 190 mm	420 x 360 x 130 mm	420 x 360 x 190 mm
Inner Dimension :	200 x 135 x 85 mm	325 x 210 x 110 mm	310 x 250 x 107 mm	330 x 270 x 175 mm	380 x 310 x 120 mm	380 x 310 x 180 mm
Case can fit for:	AL1200NP II, AL1200WP II, AL1200WP II, CF1200P II, Black Molly IV, Black Molly V, AL1200NP Tail II, AL1200WP Tail II, AL1100RAFO II, RGB White II	VL4200P, VTL3800P, TL3500P, Supreme. VTL2600P, TL2600P VL10000P, VL8000P Tri Color, VTL8000P, TL4800P, TL8000P, CB6500P, CB9000P, CB15000P, VL15000P Pro Mini, VL15000P Pro Mini TC, VL33000P II	TL4800PC Slim, VTL8000PC Slim	All Purpose	Go Pro Tray Kit Set	All Purpose

FLUORODIVE KIT SETS

Science has discovered corals contain Fluorescent Proteins invisible to the naked eye that jump into view using innovative high-intensity fluorolights and filters.


Bigblue Fluorodive Kits provide everything you need to experience this incredibly beautiful effect. You get specially designed filters to precisely match the coral fluorescence wavelength, and yellow blue-barrier filters to increase the intensity of the colors emitted by the corals. Our innovative design is the only one that allows you to easily switch between blue and white light to accommodate changes in dive conditions.

These kits are suitable for night divers, resorts, science institutions, ecological monitoring groups and specialty photographers.

Truly there is nothing that can match the beauty of witnessing coral fluorescence on your next night dive!







CAMERA FILTERS

Camera filters are available for you to capture the macro or wide angle photos or videos of the memorable aquatic creatures.



FILFLUORO15000

Fluorodive filter for VL 15000P Pro Mini / VL 15000P Pro Mini Tri Color / CB15000P



wavelength and captured through a barrier filter FDK38

CF450 / CF1200P / AL1200WP / AL1200XWP / AL1200WP Tail / BLACK MOLLY II / BLACK MOLLY III Fluorodive Kit



FDK35

CF450 II / CF1200P II / AL1200WP II / AL1200XWP II / AL1200WP Tail II / BLACK MOLLY IV / BLACK MOLLY V



FDK63 CB6500P / CB9000P / VTL8000P Fluorodive Kit



FDK55

VTL3800P / VL10000P VL8000P Tri Color Fluorodive Kit



FDK44

VL4200P / VTL2600P Fluorodive Kit



CAMERA TRAY 27





Camera Tray 27 with 27cm long tray.
Two I" Ball joint arms with no-slip grip.
Compatible with Olympus TG4/TG5 Housings.

BBGPTRAY

Go Pro Tray



Go Pro Hot Shoe Adapter



GO PRO KIT SETS

GP4200 Kit

- I pc. of Double Clip (CLP02)
- I pc. of Go Pro Tray (BBGPTRAY)
- Light not included



GP1200 Kit

- 2 pcs. of Double Clip (CLP02)
- 2 pcs. of Sea & Sea Standard (DA009)
- I pc. of Go Pro Tray (BBGPTRAY)
- · Lights not included



GP450 Kit

- 2 pcs. of Mounting Clip (CLIPMINTCF)
- 2 pcs. of Double Clip (CLP02)
- 2 pcs. of Sea & Sea Standard (DA009)
- I pc. of Go Pro Tray (BBGPTRAY)
- · Lights not included



Protective Case for Go Pro Tray Kit Set

- I pcs. of AL1200WP II
- I pcs. of AL1200XWP II
- 2 pcs. of Double Clip (CLP02)
- 2 pcs. of Sea & Sea Standard (DA009)
- I pc. of Go Pro Tray (BBGPTRAY)



EXTENDGPTRAY

Extendable Go Pro Tray







SINGLEARMTRAY

Single Arm Go Pro Tray





FLEXIGPTRAY

7" Flexi Arm Go Pro Tray



FLEXISINGLEARMTRAY

7" Flexi Arm Single Arm Tray



FLEXIEXTENDGPTRAY

7" Flexi Arm Extendable Go Pro Tray

BATTERIES & CHARGERS



BATCELL18650

Battery for AL1200NP II / AL1200WP II / AL1200XWP II / AL1200NP Tail II / AL1200WP Tail II / CF1200P II / AL1100RAFO II/ HL1000XW / HL1000N / RGB White II



BATCELL18650x4

Battery for VLI0000P / VTL8000P / TL4800P / VL8000P Tri Color



CR2032

Battery for Easy Clip Light



BATCELL21700x8

Battery for VL33000P II



BATCHR18650x4 SUPREME

Charger for TL3500P Supreme



BATCHR32650/26650

Charger for VL4200P / VTL3800P / TL3500P / Black Molly IV /Black MollyV / VTL2600P / TL2600P



BATCELL26650

Battery for Black Molly IV / Black Molly V



BATCELL21700x4

Battery for CB6500P / CB9000P



BATCELL18650x8

Battery for TL4800PC Slim / VTL8000PC Slim



BATCHR18650x4

Charger for VL10000P / VTL8000P / TL4800P / VL8000P Tri Color



BATCHR21700x8

Charger for VL33000P II



BATCHR18650x8

Charger for TL4800PC Slim / VTL8000PC Slim



BATCELL32650

Battery for VL4200P / VTL3800P / TL3500P / VTL2600P / TL2600P



BATCELL18650x7

Battery for VL15000P Pro Mini / VL15000P Pro Mini Tri Color / CB15000P / TL8000P



BATCELL18650x4SUPREME

Battery for TL3500P Supreme



BATCHR21700x4

Charger for CB6500P / CB9000P



BATCHR18650x7

Charger for VL15000P Pro Mini / VL15000P Pro Mini Tri Color / CB15000P / TL8000P



BATCHR18650

Charger for AL1200NP II / AL1200WP II / AL1200XWP II / AL1200NP Tail II / AL1200WP Tail II / CF1200P II / AL1100RAFO II / HL1000XW / HL1000N / RGB White II



ACCESSORIES



TLGGLOVE

Goodman glove for TL2600P / VTL2600P /TL3500P Supreme / VL4200P /VTL 3800P / TL3500P /VL10000P /VTL8000P / TL4800P /VL8000P Tri Color / CB6500P / CB9000P / Black Molly IV / Black Molly V



PISTOLGRIPHANDLE

Pistol Grip Handle for Black Molly IV / Black Molly V / TL2600P / VTL2600P / TL3500P / VTL3800P / TL3500P Supreme / VL4200P / CB6500P / CB9000P / VL10000P / VL8000P Tri Color / VTL8000P / TL4800P / TL8000P / VL15000P Pro Mini / VL15000P Pro MiniTri Color / CB15000P



LNTHANDLE

Lantern style handle



NPGGLOVEM

Neoprene glove for Mini Light



NPGGLOVE

Neoprene glove for AL1200NP II / AL1200WP II / AL1200XWP II / AL1200NP Tail II / AL1200WP Tail II



SIDEMOUNTCONNECTOR CABLE-90

90 degree sidemount connector cable for TL4800PC Slim / VTL8000PC Slim



CONNECTOR CABLE-180

180 degree connector cable for TL4800PC Slim / VTL8000PC Slim



GHA-01C

Goodman handle with connector for TL2600P / TL3500P / TL4800P / TL4800PC Slim / VTL8000PC Slim / TL3500P Supreme / TL8000P



SFGHA-01C

Slim fit Goodman handle with connector for TL2600P / TL3500P / TL4800P / TL4800PC Slim / VTL8000PC Slim / TL3500P Supreme/ TL8000P

ACCESSORIES



SNOOT 35

Snoot Connector for ALI200WP II / ALI200XWP II / ALI200WPTail II / RGBWhite II



SNOOT 38

Snoot Connector for AL1200WP / AL1200XWP / AL1200WP Tail / RGB White



SNOOT 55

Snoot Connector for VL6000P



SNOOT 63

Snoot Connector for CB6500P / CB9000P



FILFLUORO I 5000

Fluorodive filter for CB15000P / VL15000P Pro Mini / VL15000P Pro Mini Tri Color



FDMASKYL

Yellow filter for Fluorodiving



FILRED35

Red filter for ALI200WP II / ALI200XWP II / ALI200WP Tail II



FILREDSM

Red filter for AL1200WP / AL1200XWP / AL1200WP Tail



FILREDNP

Red filter for ALI200NP II / ALI200NP Tail II



FILREDHLN

Red filter for HL1000N / HL450N



FILYELLG

Yellow filter for VTL3800P / VL10000P



FILYELSM

Yellow filter for AL1200WP / AL1200XWP / AL1200WP Tail / Black Molly III



FILYEL35

Yellow filter for AL1200WP II / AL1200WP Tail II / Black Molly V



FILYEL44

Yellow filter for VL4200P / VTL2600P



FILYEL63

Yellow filter for VTL8000P / VTL8000PC Slim





CLIPMNTSPOT

Mounting clip for Green Spot Light / Red Spot Light



CLIPMNTAL

Mounting clip for ALI200WP II / ALI200XWP II / CFI200P II



CLIPMNTCF

Mounting clip for CF450 II / AL450WM Tail / AL1200WP Tail II



GO PRO MOUNT

Go Pro Mount for Go Pro Camera



I" BALL JOINT

I" Ball Joint fit for Black Molly IV / Black Molly V VTL2600P / VL4200P / VTL3800P / VL8000P Tri Color / VL10000P / VL4200P / VTL 8000P / CB6500P / CB9000P / VL33000P II / VL15000P Pro Mini / VL15000P Pro MiniTri Color / CB15000P



SPRING CORD

Lenght: 330mm



EASY RELEASE MOUNT

Easy Release Mount fit for helmet / DPV



NPHOODMS

Neoprene hood for one light holster



NPHOODMD

Neoprene hood for two light holster



NPRPOUCH

Neoprene pouch with retractor for ALI200NP II / ALI200WP II / ALI200XWP II / ALI200NP Tail II / ALI200WP Tail II



NPRPOUCHM

Neoprene pouch with retractor for Mini Light





3L	5L	7L	
Dia. 140 x L. 330 mm	Dia. 170 x L. 380 mm	Dia. 180 x L. 510 mm	
Available in 5 colors Yellow, Green, Pink, Light Blue, Blue	Available in 5 colors Yellow, Green, Pink, Light Blue, Blue	Available in 6 colors Yellow, Green, Pink, Light Blue, Blue, Black	

EASY RELEASE MOUNT SERIES











PHOTO/VIDEO ARMS & ACCESSORIES

Float Arms Series



9" Float Arm

Dia. 70 x 228mm

Weight above water: 28 lg

Buoyancy lift: 360g



13" Float Arm

Dia. 70 x 330mm

Weight above water: 430g

Buoyancy lift: 612g

Flexi Arms Series





6" Flexi Arm Hot Shoe YS Adapter





6" Flexi Arm Hot Shoe Ball Adapter



YS Adapter



PHOTO/VIDEO ARMS & ACCESSORIES

Clips

- Made of T6061 grade aluminum
- · Available in 2 versions: double clip and a triple clip
- · Ergonomic handle makes it easy to twist on and off





Arms

- Full T6061 grade aluminum
 Available in 4 lengths: 5", 8", 12", 16"



For I" ball joint to connect to extend the connection









12" Arm



DA SERIES



DA001

Hot Shoe Adapter



DA002

Sea & Sea Adapter



DA003

Light & Motion Adapter



DA004

Standard Dovetail Plate



DA005

8mm Thread



DA006

Sea & Sea Light Adapter



DA007

Sea & Sea Hot Shoe Adapter



DA008

Sea & Sea Medium



DA009

Sea & Sea Standard



DA010

Base Plate Ball Mount



DAOII

T-Groove Adapter



DA012

Universal Mount Base



DA013F

1/4" Thread Adapter



DA013M

1/4" Thread Adapter



DA014

Ikelite 200 Strobe Adapter



DA015

Single Ball Arm with Sea & Sea Adapter



DA016

UK Light Adapter



DA017

Standard Dovetail



DA018

Iron Z Series Strobe Adapter



DA022

Slot Stay



DA023

6mm Thread Adapter



Australia Distributor : Adreno

Contact Person : Robbie Lewis E-mail : robbie@adreno.com.au Phone : 61-07-3391-2299

Mail: 54-58 Deshon Street, Woolloongabba, Brisbane, QLD 4102, Australia

Austria Distributor : Custom Diving Systems

Contact Person : Yannig Charles E-mail : contact@cds-pro.com Phone : +33 0 6 114 81 114 Mail : 1143 Route De La Jairaz – 73120 Courchevel, France

Belgium/ Netherlands / Luxembourg Distributor : Custom Diving Systems

Contact Person : Yannig Charles E-mail : contact@cds-pro.com Phone : +33 0 6 114 81 114 Mail : 1143 Route De La Jairaz – 73120 Courchevel, France

Brazil Distributor: Seasub

Contact Person : Pablo Y. Varela E-mail : pablo@seasub.com.br Phone : 55-11-38328342 Mail : Rua Baumann, 1039/1051, Cep 05318000, Sao Paulo, Brazil

Canada Distributor : Pacific Scuba Industries

Contact Person : Michael Joseph & Laura Valente E-mail : laurabioblue@outlook.com

Phone: 778-245-1962 Mail: 31519 Southern Dr

Mail: 31519 Southern Dr, Abbotsford, BC V2T5P1, Canada

Czech Republic Distributor: Olson S.R.O

Contact Person : Ing. Barbora Peskova E-mail : peskova@olson.cz Phone : 420 602 376 896 Mail : Holesovicka Trznice, Hala C.16 Bubenske Nabrezi 306/13 170 04 Praha 7 Czech Republic

France / Europe Distributor : Custom Diving Systems

Contact Person : Yannig Charles E-mail : contact@cds-pro.com Phone : +33 (0) 6 114 81 114 Mail : 1143 Route De La Jairaz – 73120 Courchevel, France

Germay Distributor : Custom Diving Systems

Contact Person : Yannig Charles E-mail : contact@cds-pro.com Phone : +33 (0) 6 114 81 114 Mail : 1143 Route De La Jairaz – 73120 Courchevel. France

Greece / Croatia Distributor : Custom Diving Systems

Contact Person : Yannig Charles E-mail : contact@cds-pro.com Phone : +33 (0) 6 114 81 114 Mail : 1143 Route De La Jairaz – 73120

Courchevel, France

Indonesia Distributor : Divesea Indonesia

Contact Person : Chatra Hapsoro E-mail : bigblue.id@gmail.com Phone : 62-82145490450 Mail : Metro Park Residence. Unit MA-LG-05.

JL. Pilar Mas Utama Raya Kav 28, Kebon Jeruk, Jakarta Barat 11520 Indonesia

Italy/ Malta Distributor : Custom Diving Systems

Contact Person : Yannig Charles E-mail : contact@cds-pro.com Phone : +33 (0) 6 114 81 114 Mail : 1143 Route De La Jairaz – 73120 Courchevel, France

Japan Distributor : Zero Co., Ltd.

Contact Person: Katsuhiko Saotome E-mail: zero@zero-zero.co.jp Phone: 81-3-5721-1906 Fax: 81-3-5721-1910 Mail: 1-11-5 Takaban, Meguro-Ku,

Tokyo, Japan

Korea Distributor: King Sports
Contact Person: Mr. Chang / Yun Hee Chang
E-mail: kingdive@kingsports.co.kr

Phone: 82-2-3628251

Mail: 35-4, 1GA, Manri-Dong, Chung-Gu, Seoul, Korea

Kuwait Dealer: Ilmunz Marine Co.

Contact Person : Abdulrahman Al-Serheed F-mail : Ilmunz@ilmunz.com

E-mail: Ilmunz@ilmunz.com Phone: +965 95500969

Mail: Creative Design Center, Block 1, Street 10,

Building 63, Store 2.2, Shuwaikh Industrial 1, Kuwait

Malaysia Distributor : Rainbow Runner Sdn Bhd

Contact Person : Sim

E-mail: ops@rainbowrunner.net Phone: 60-341-622837 Fax: 60-341-617837

Mail: 5, Ukay Boulevard, Jalan Lingkaran Tengah 2, Hulu Kelang, 68000 Ampang,

Selangor, Malaysia



Contact Person: Hussen Abdulla E-mail: sales@seagear.com.mv Phone: +960 3302737

Mail: M. Araliya - Ground Floor - Alhivilaa Magu. 20292 Male, Maldives

Mexico Distributor: Comercializadora UNIF Sa De CV

Contact Person: Tristan Termat E-mail: tristan@unifmexico.com.mx Phone: + 52 984 80 311 68

Mail: Calle 4 nte Mza 42 Lote 4-1 Local B Entre 25 y 30 Avenida Col. Centro Localidad : Playa del Carmen.Q. Roo Municipio: Solidaridad CP: 77710 Mexico

New Zealand Distributor: Sea Tech Ltd.

Contact Person: Dave Moran E-mail: info@seatech.co.nz Phone: 64-9-5210684

Mail: 47 Tautari St. Orakei. Auckland 1071,

New Zealand

Philippines Distributor: Dive Supply Subic, INC.

Contact Person: Rowena Merto E-mail: muriel@aquaventurewhitetip.com

Phone: 63-2-708-9996

Mail: Office 6&7 EMS Building, 14th Street Subic Gate Perimeter Road, Subic Bay Freeport Zone, Olongapo City, 2222 Philippines

Poland Distributor: Waterfall

Contact Person : Darek E-mail: darek@waterfall.pl Phone: 48-600-340-002

Mail: UL. Klimczaka 22D/3, 02-797 Warszawa

Poland PL 7621470585

Contact Person : Sales Office E-mail: info@aquafun.se Phone: 46-0-40-295-300

Mail: Sangleksgatan 4E, 215 79, Malmo,

Sweden

Singapore Distributor: **Divesea Pte Ltd**

Contact Person: Fairuz Ahmad E-mail: team@divesea.com.sg Phone: 65-85115164 Mail: 3 Coleman Street, #02-15. Peninsula Shopping Centre

Singapore 179804 **South Africa Distributor:**

Manex & Power Marine Contact Person: Gavin Jones E-mail: gavin.iones@manex.co.za Phone: 27-021-511-7292

Mail: 9 Paarden Eiland Road, Paarden Eiland,

South Africa

Spain/ Portugal Distributor: **Custom Diving Systems**

Contact Person: Yannig Charles E-mail: contact@cds-pro.com Phone: +33 (0) 6 114 81 114 Mail: 1143 Route De La Jairaz - 73120 Courchevel, France

Switzerland Distributor: Custom Diving Systems

Contact Person: Yannig Charles E-mail: contact@cds-pro.com Phone: +33 0 6 114 81 114 Mail: 1143 Route De La Jairaz - 73120 Courchevel, France

Thailand Distributor: Scuba Republic Thailand

Contact Person: Woranon Samakoses E-mail: scubarepublicthailand@gmail.com / bigbluelightsthailand@gmail.com

Phone: 66-0-617732363

Mail: 52 Moo 8, Theparatana (Bangna - Trad) Road, KM. 7, Bangkaew, Bangplee, Samutprakarn 10540 Thailand

Turkey Distributor : K Pro Doga Sporlari Malzemeleri Tic. Ltd. STI

Contact Person : Akin Kaftanoglu E-mail: akinkaftanoglu@yahoo.com Phone: 90-3124334479

Mail: Bulbulderesi Cad. No.: 23/A. Sevranbaglari.

Ankara, Turkey

U.A.E. Distributor: Senvar Marine Equipment

Contact Person : Abdulla Ai Kindi E-mail: senvar7@gmail.com Phone: 971-2-666-9999

Mail: P.O. Box 112790, Abu Dhabi, U.A.E.

United Kingdom / Ireland Distributor: Liquid Sports Ltd.

Contact Person : Alastair Ansell E-mail: alastair@liquidsports.co.uk Phone: 44-0-7585-935522 Mail: 11 Stag Lane, Berkhamsted, Hertfordshire, HP4 1FJ, UK

